

Geberit Duofix

Need a frame for every application?

There's a Geberit for it.




**KNOW
HOW**
INSTALLED

We've got it covered

Geberit Duofix.

The smart way to install sleek modern looking wall-hung toilets is with Geberit Duofix frame systems. Neatly concealed behind the wall, they're the perfect solution for every style, shape and space - from standard installations to under a window or sloping ceiling.

Strong, secure and flexible, our frame systems sit within pre or dry wall installations, bolted to the floor, supporting the sanitaryware and keeping it firmly in place. With Geberit Duofix, it's easy to create a great contemporary look in any bathroom or cloakroom.

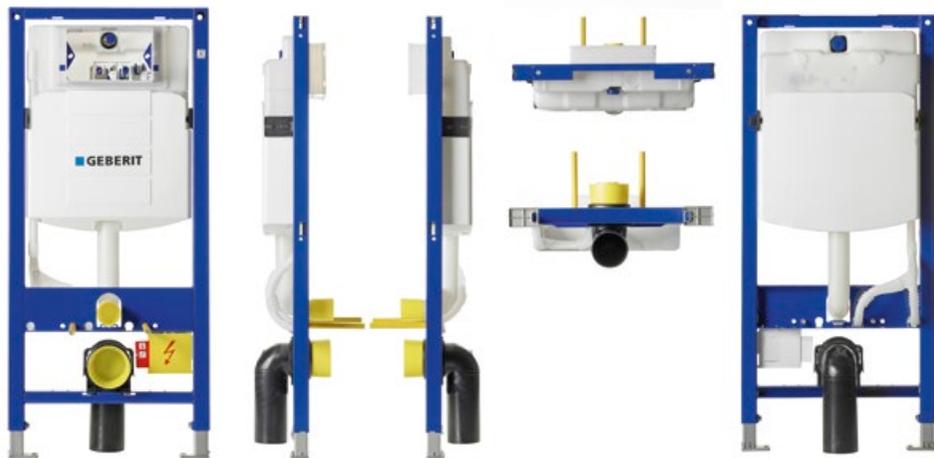

- Frames available in a wide range of heights, depths and functionalities
- Easily installed with only four fixing points
- Adjustable drainage bend positioning
- Pre-wall fixing brackets and 90° drainage bend included
- Tested to withstand 400kg of weight
- 25 years spare parts availability guaranteed



Solutions for every space. Geberit Duofix.

All around the world, in all sorts of applications, Geberit Duofix concealed cisterns and frame systems provide the perfect solution.

Whatever the challenge, from working within severely limited spaces to moving existing connections or changing from a floor standing WC to a wall-hung installation, there's a Geberit for it. Our Geberit Duofix range is so comprehensive that we can always give you the right answer, for any bathroom.

To book yourself onto one of our training days visit:


www.geberit.co.uk/installertraining

or call **01926 516800**.



Geberit Duofix is tested for strength and durability. Six metal plates weighing in excess of 400kg (63 stone) are loaded on to a support acting as the WC.

Get the know-how. Free installer training.



Geberit Duofix systems are simple to install - and we make it even easier with free training at our purpose built academies in Warwick and Dublin.

With a free lunch and refreshments supplied you'll gain all the know-how you need to feel confident in installing Geberit products. We'll even send you a free frame and set of flush plates so you can put your new skills to test. installation instructions and videos.

To book yourself onto one of our training days visit:

www.geberit.co.uk/installertraining

or call **01926 516800**.

Instant support with our ProApp

Download the Geberit ProApp and you'll have all the information you need at your fingertips, anytime and anywhere.

ProApp provides you with full access to product specifications, installation instructions and videos. It'll also identify any Geberit product by simply scanning its barcode - and it even lists all relevant spare parts.

For know-how at your fingertips, download the Geberit ProApp FREE today



Geberit
ProApp
for iPhone
and iPad



Geberit
ProApp
for
Android



Geberit has a dedicated technical support team on hand to advise and assist.
Call **01926 516800** or email technical@geberit.co.uk

A frame for every application. Geberit Duofix.

Geberit Duofix Sigma range:



Geberit Duofix frame for wall-hung WC, H112, with Sigma cistern 12cm

- 111.383.00.5
- For standard installations with no height restrictions and comes with pre-wall brackets and a 90 degree drainage bend.



Geberit Duofix frame for wall-hung WC, H112, with Sigma cistern 12cm, connection for odour extraction with filtration

- 111.353.00.5
- Ideal for bathrooms without natural ventilation. To operate the odour extraction technology frame requires an electrical connection and the Geberit Sigma40 flush plate.



Geberit Duofix frame for wall-hung WC, H114, with Sigma cistern 8cm

- 111.799.00.1
- Extra slim cistern for space saving installations where duct depth is limited. Ideal for small bathrooms and cloakrooms where drainage is possible through the floor or back, straight through the wall.



Geberit Duofix frame for wall-hung WC, H112, with Sigma cistern 12cm, disabled installation

- 111.352.00.5
- Designed to accommodate grab rails and WCs with a longer projection. The height of the ceramic can be altered during the installation phase.



Geberit Duofix special frame for wall-hung WC, H112, with Sigma cistern 12cm, corner installation

- 111.399.00.5
- Perfect for corners to help utilise all the space in the bathroom.


Geberit Sigma flush plates:



Sigma01



Sigma50



Sigma10



Sigma60



Sigma20



Sigma70



Sigma30



Sigma80



Sigma40

Note: Flush plates available in a choice of colours and finishes.

More frames, more flush plates and accessories.

Geberit Duofix.

Geberit Duofix Kappa:



Geberit Duofix frame for wall-hung WC, H82, with Kappa cistern 15cm

- 111.260.00.1
- Best suited for installations under windows and sloping roofs

Geberit Duofix Furniture:



Geberit Duofix frame for wall-hung WC, H79, with concealed cistern for low height furniture


- 111.706.00.1
- For installations into bathroom furniture 500mm with minimum inside dimension of 465mm. Supplied with pneumatic dual flush button.

Geberit Duofix frames are also available for washbasins, bidets and urinals. To see the full range, order your copy of the Geberit Washroom and Bathroom Product Guide by calling **0800 007 5133** or visit www.geberit.co.uk/catalogue

Kappa flush plates:



Kappa20



Kappa50

Accessories:



Geberit Duofix wall anchoring extension bolts

- 111.887.00.1
- To increase pre-wall anchoring from 200mm up to 600mm.



Geberit Duofix support brackets for shallows

- 111.847.00.1
- For additional support when installing wall-hung WCs that have less than 170cm wall contact.



Geberit Duofix foot fastening to rear wall

- 111.867.00.1
- For alternative feet fastening of Geberit Duofix frames - ideal for installations with underfloor heating or water proofing materials.



Geberit S-bend

- 388.350.29.1
- Enables wall-hung WCs to be connected to existing floor drain.

Flush buttons for all:



Type01 flush button



Type01 flush button



Type10 flush button

Installation steps.

Geberit Duofix.



Step 1: Mount Duofix WC frame to the wall

There are four fixing points - two to the wall and two into the floor.



Step 2: Level and secure

Once fixed, ensure that the frame is level. Check that all elements in the cistern are securely in position.



Step 3: Connect

Connect the isolation valve to the water supply and connect the drainage.



Step 4: Protection

Once the frame is in position and the supply and drainage are connected, ensure that you protect the flush pipe, drainage connection and metal rods with the covers provided. This will stop debris building up during the plastering and tiling phase.



Step 5: Plaster and tile your installation

You are now ready to plaster and tile your installation. When you've completed that, you can cut down the protection housing flush with your tiles and remove the protection covers ready to fix the WC.



Step 6: Fix WC and flush plate

Using the WC fixings provided by Geberit or your WC ceramic manufacturer push the WC onto the metal rods and fasten the pan. Turn on the isolation valve and fit the flush plate for that finishing touch.

Installation tips.



The Geberit S-bend can aid you here if you are replacing a standard close coupled WC and the drainage connection is in the floor.

→ 388.350.29.1



Geberit system rail is ideal for fitting more than one frame and a great solution for installations against plaster boards on stud walls.

→ 111.878.00.1

Geberit Sales Ltd
Geberit House
Edgehill Drive
Warwick
Warwickshire
CV34 6NH

T 01926 516800
E enquiries@geberit.co.uk
F 01926 400 101

Literature hotline:
0800 007 5133

→ www.geberit.co.uk